

FIBER SPECIFICATIONS						
ITEM #	OPERATING WAVELENGTH	MODE FIELD DIAMETER	CLADDING	COATING	CUTOFF WAVLENGTH	NA
PM980-XP	970 - 1550 nm	6.6 ± 0.5 µm @ 980 nm	125 ± 2 µm	245 µm ± 15 µm	920 ± 50 nm	0.12

*SPECIFICATIONS BASED ON BARE-FIBER DATA.
A. OPERATING WAVELENGTH IS TYPICALLY 200 NM ABOVE THE CUTOFF WAVELENGTH.
B. MFD IS A NOMINAL, CALCULATED VALUE, ESTIMATED AT THE OPERATING WAVELENGTH(S) USING A TYPICAL VALUE OF NA & CUTOFF WAVELENGTH

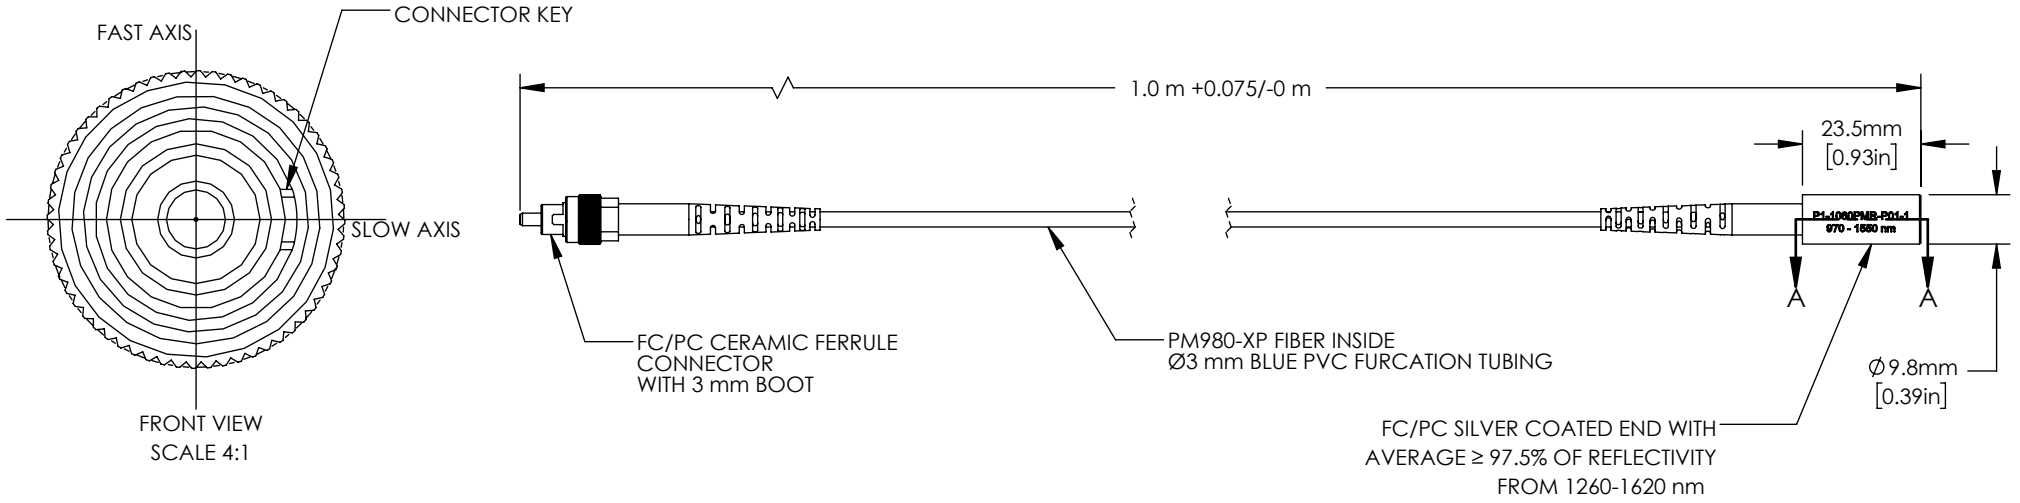

CABLE SPECIFICATIONS	
ALIGNMENT WAVELENGTH	1064 nm
MAX INSERTION LOSS	0.7 dB
MIN EXTINCTION RATIO	20 dB
CONNECTOR TYPE	FC/PC
KEY WIDTH	NARROW (2.0 mm)
KEY ALIGNMENT	SLOW AXIS
OPERATING TEMPERATURE °C	0 to 70°C
STORAGE TEMPERATURE °C	-45 to 85°C

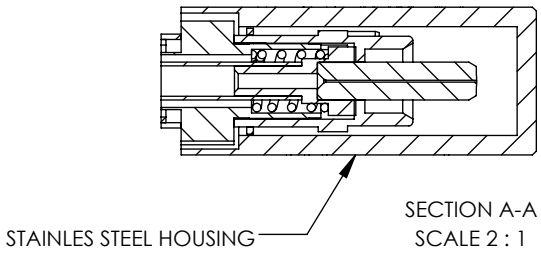

INCLUDED BUT NOT SHOWN
- PLASTIC DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JB	2/FEB/13
APPROVAL	HC	27/OCT/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

PM RETROREFLECTOR CABLE,
970 - 1550 nm, FC/PC, 1 m

MATERIAL	REV
N/A	G

ITEM #	APPROX WEIGHT
P1-1060PMR-P01-1	30 g