

| FIBER SPECIFICATIONS | | | | | | |
|---|---|---|---|---|---|---|
| FIBER TYPE | OPERATING WAVELENGTH | CUTOFF WAVELENGTH | MODE FIELD DIAMETER | CLADDING DIAMETER | COATING DIAMETER | NA |
| SM600 | 630 - 780 nm | 500 - 600 nm | 3.6 - 5.3 µm @ 633 nm | 125 ± 1.0 µm | 245 ± 15 µm | 0.10 - 0.14 |

*SPECIFICATIONS BASED ON BARE-FIBER DATA

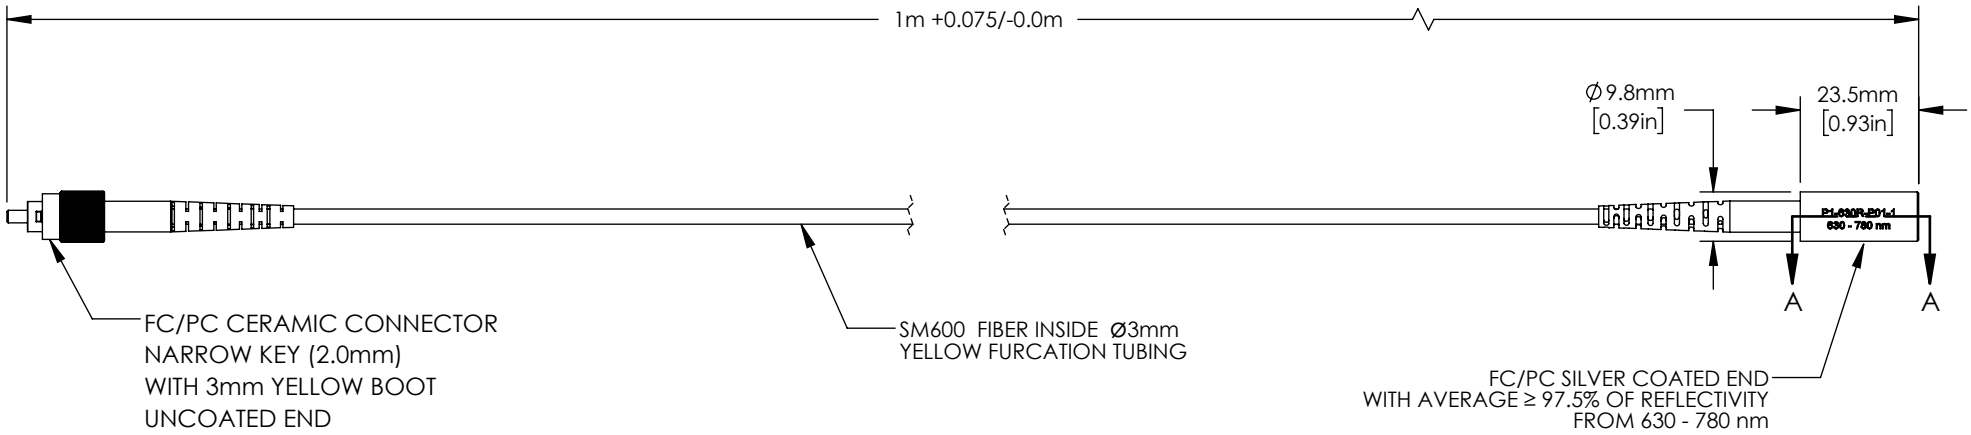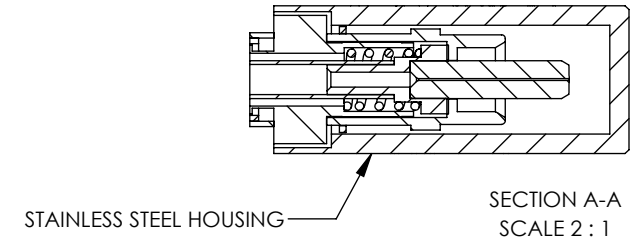


INCLUDED BUT NOT SHOWN:
- PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | IR | 21/OCT/16 |
| APPROVAL | BAG | 26/SEPT/19 |

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SM RETROREFLECTOR CABLE,
630 - 780 nm, FC/PC, 1m

| MATERIAL | REV |
|---|---|
| N/A | C |

| ITEM # | APPROX WEIGHT |
|---|---|
| P1-630R-P01-1 | .03 kg |