
| FIBER SPECIFICATIONS | | | | | | |
|---|---|---|---|---|---|---|
| FIBER TYPE | OPERATING WAVELENGTH | CUTOFF WAVELENGTH | MODE FIELD DIAMETER | CLADDING DIAMETER | COATING DIAMETER | NA |
| 780HP | 780 - 970 nm | 730 ± 30 nm | 5.0 ± 0.5 µm @ 850 nm | 125 ± 1 µm | 245 ± 15 µm | 0.13 |

*SPECIFICATIONS BASED ON BARE-FIBER DATA.

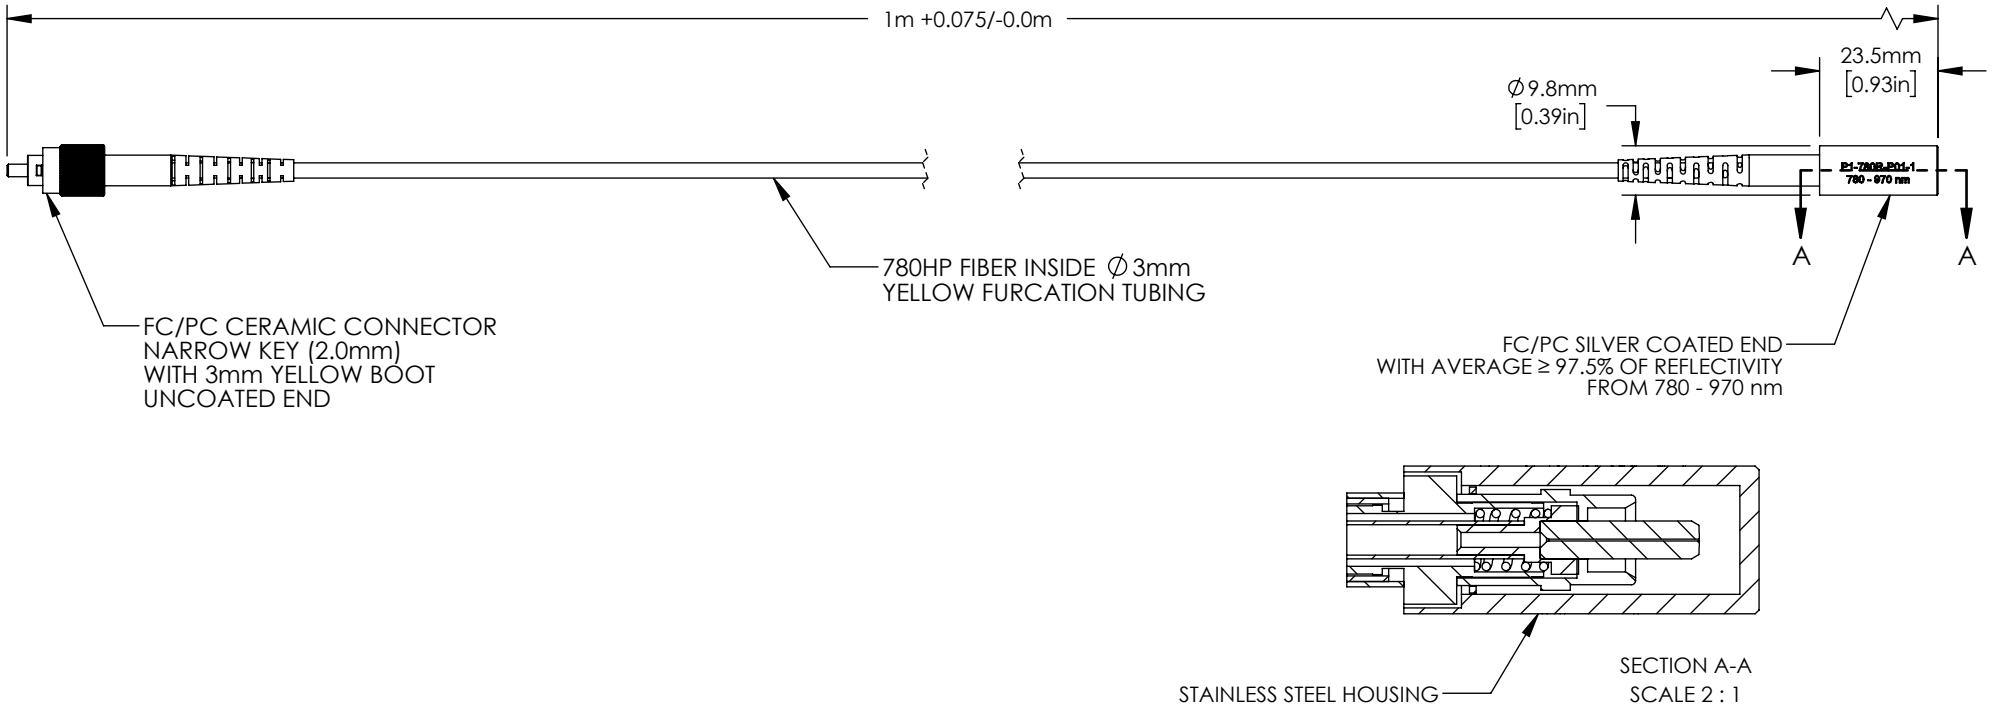


INCLUDED BUT NOT SHOWN:
- PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | IR | 21/OCT/16 |
| APPROVAL | BAG | 26/SEPT/19 |

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SM RETROREFLECTOR CABLE,
780 - 970 nm, FC/PC, 1m

| MATERIAL | REV |
|---|---|
| N/A | D |

| ITEM # | APPROX WEIGHT |
|---|---|
| P1-780R-P01-1 | .03 kg |