
FIBER SPECIFICATIONS						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SM980-5.8-125	980 - 1550 nm	870 - 970 nm	5.3 - 6.4 µm @ 980 nm	125 ± 1.0 µm	245 ± 15 µm	0.13 - 0.15

*SPECIFICATIONS BASED ON BARE-FIBER DATA

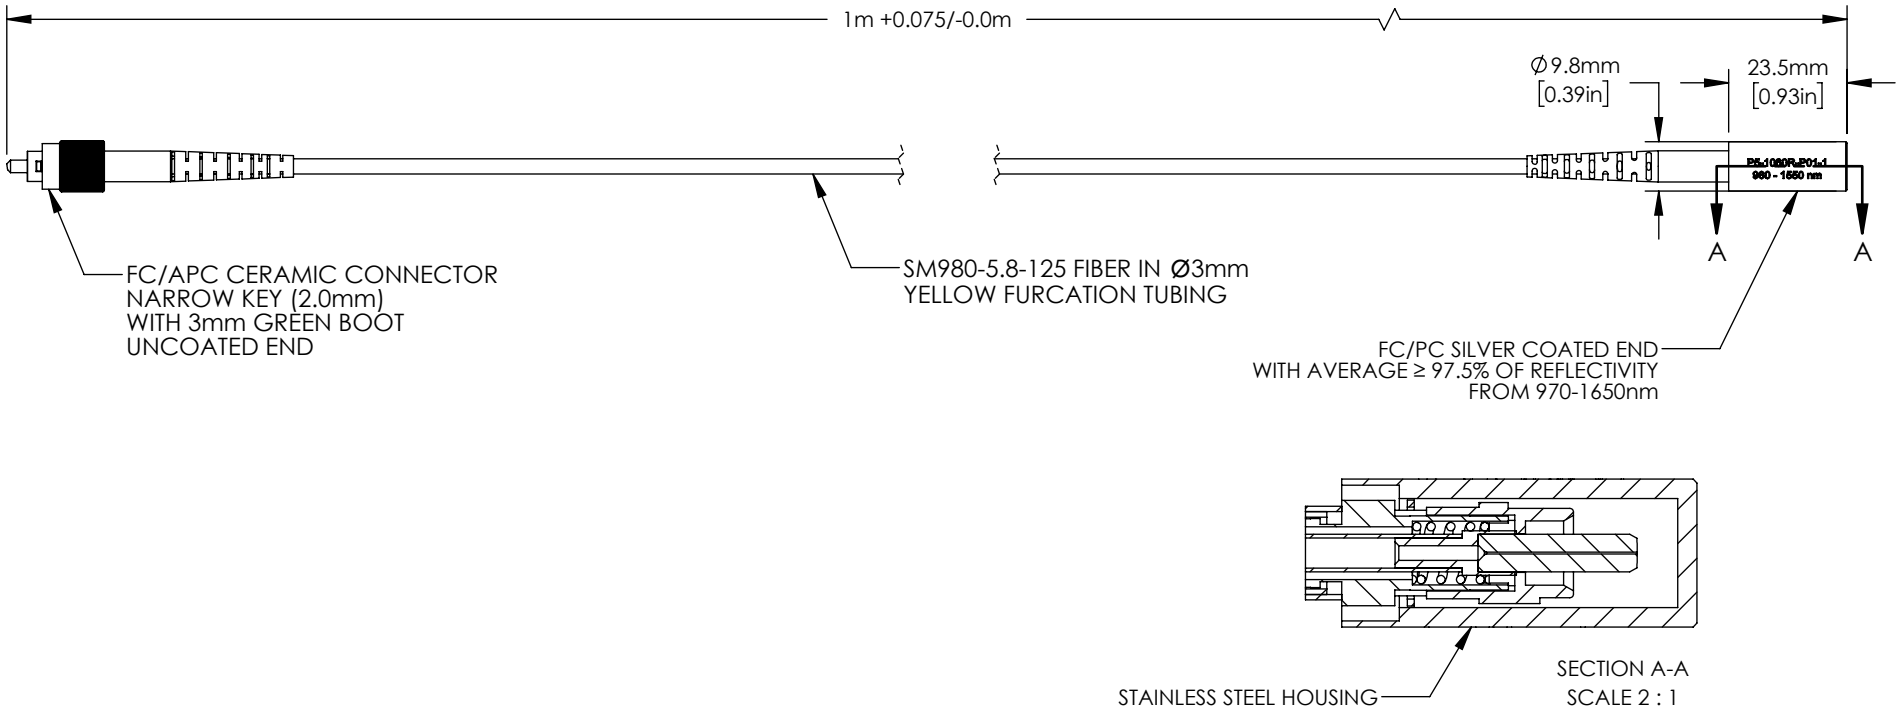

INCLUDED BUT NOT SHOWN:
- PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JB	02/FEB/13
APPROVAL	BAG	26/SEPT/19

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SM RETROREFLECTOR CABLE,
970 - 1650 nm, FC/APC, 1m

MATERIAL	REV
N/A	F

ITEM #	APPROX WEIGHT
P5-1060R-P01-1	.03 kg