

FIBER SPECIFICATIONS						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SM600	630 - 780 nm	500 - 600 nm	3.6 - 5.3 µm @ 633 nm	125 ± 1.0 µm	245 ± 15 µm	0.10 - 0.14

*SPECIFICATIONS BASED ON BARE-FIBER DATA

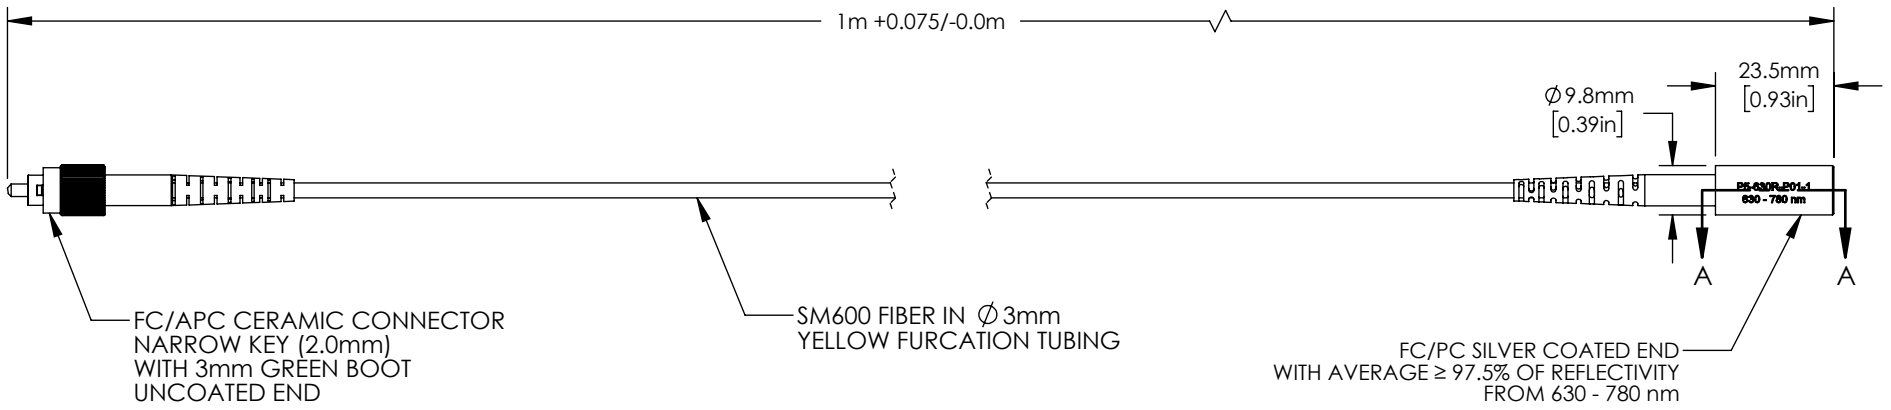

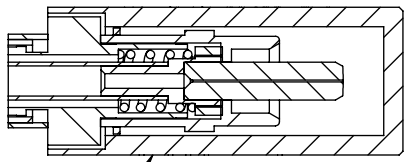

INCLUDED BUT NOT SHOWN:
- PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	21/OCT/16
APPROVAL	BAG	26/SEPT/19

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SM RETROREFLECTOR CABLE,
630 - 780 nm, FC/APC, 1m

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
P5-630R-P01-1	.03 kg