





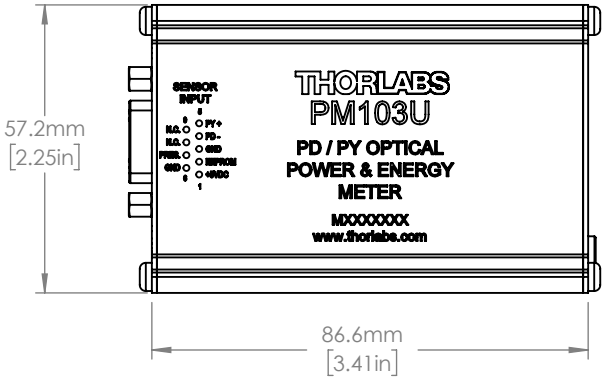

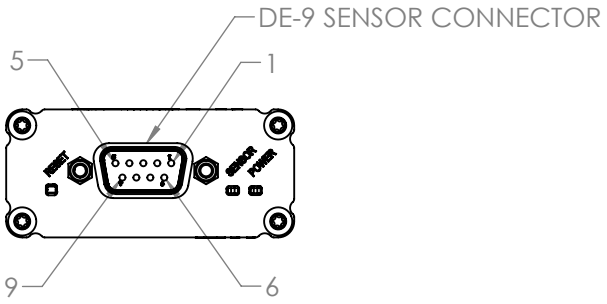

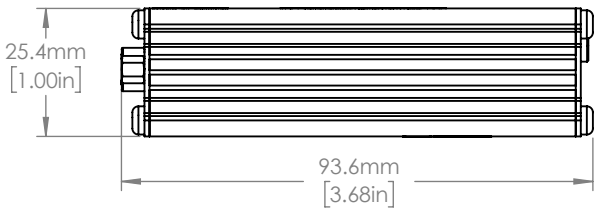

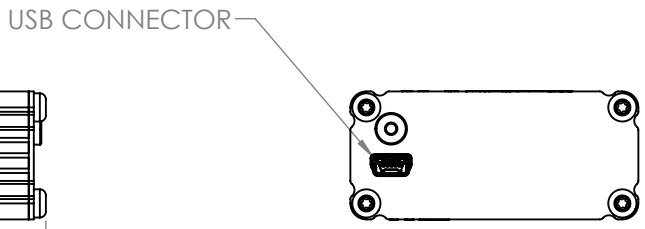

DE-9 Sensor Connector		
Pin	**Function**	**Description**
1	+5 VDC	Connect to Power Supply with 5 VDC / 50 mA
2	EEPROM	Sensor Memory for the Calibration Data
3	AGND	Analog Ground for Photodiode Anode, Pyro Sensor , NTC
4	PD -	Photodiode Cathode Input
5	PY+	Pyrosensor Input
6	DGND	Digital Ground for EEPROM and 5V Output
7	PRESENT	Sensor Recognition
8	N.C.	Not Connected
9	N.C.	Not Connected

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	mur	29/Jan/21
APPROVAL	mgo	03/Feb/21

COPYRIGHT ©2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Optical Power&Energy Meter

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
PM103U	0.16 kg