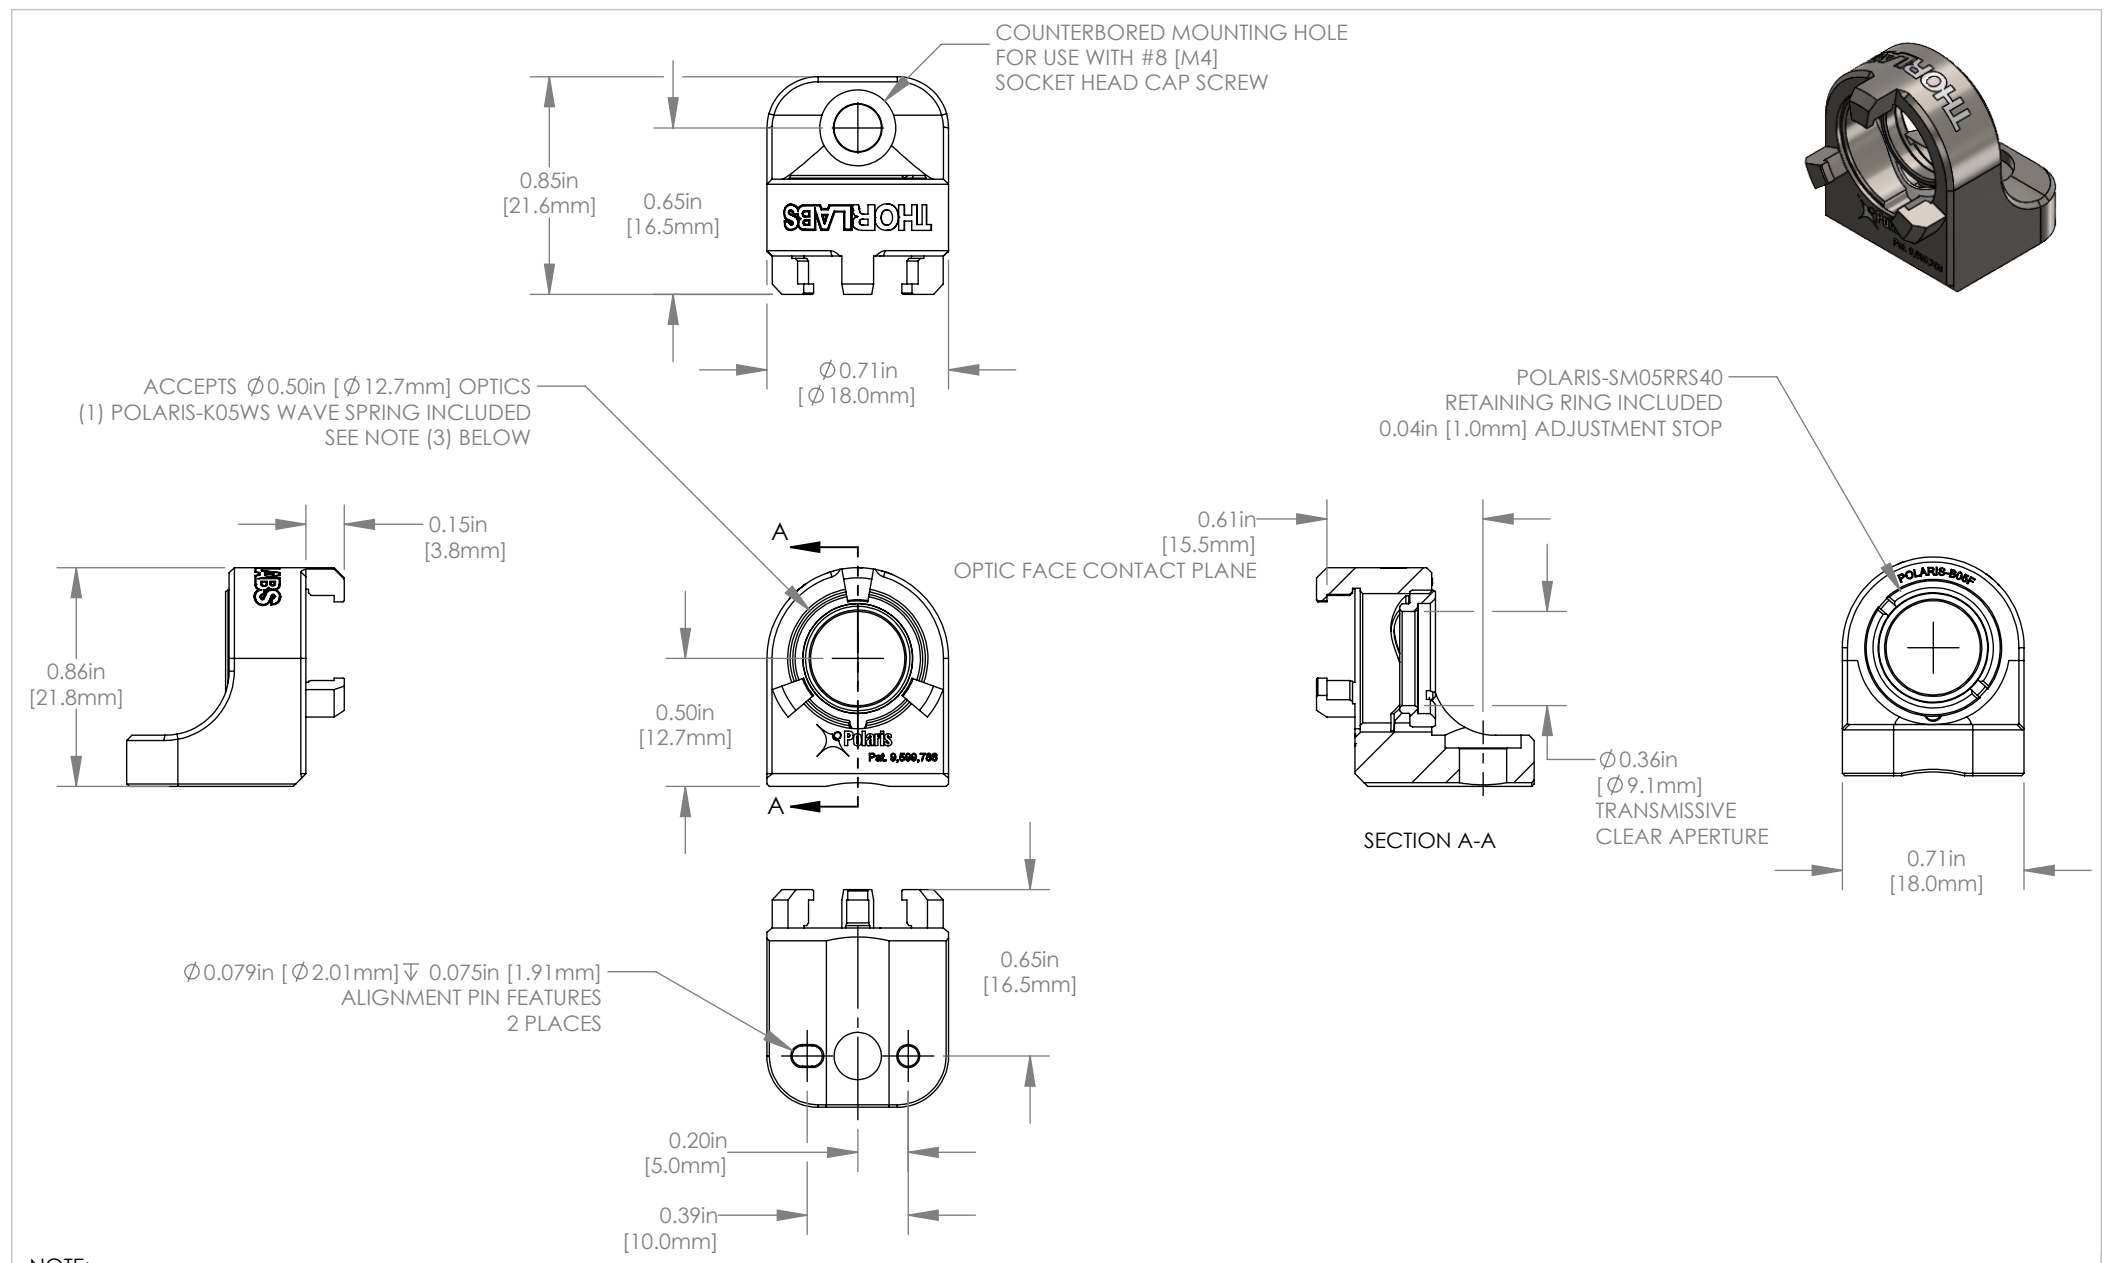


NOTE:

1) RECOMMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURES IS A STANDARD Ø2mm DIN 7-m6 (ISO 2338) GROUND DOWEL PIN (Ø2.002 mm TO Ø2.008 mm).
2) FOR A Ø2mm x 5mm PIN, WE RECOMMEND Ø0.0791in TO Ø0.0796in x 0.185in +/- 0.005in DEEP HOLES BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF +/- 0.003in.
3) OPTIC BORE ACCEPTS Ø0.50in [Ø12.7mm] OPTICS. MAX THICKNESS AND CLEAR APERTURE VARIES AS FOLLOWS:
 3.1) WITH POLARIS-K05WS & POLARIS-SM05RRS40: MAX OPTIC THICKNESS IS 0.28in [7.0mm], TRANSMISSIVE CLEAR APERTURE IS Ø0.36in [Ø9.1mm].
 3.2) WITH POLARIS-SM05RR ONLY (SOLD SEPARATELY): MAX OPTIC THICKNESS IS 0.33in [8.5mm], TRANSMISSIVE CLEAR APERTURE IS Ø0.43in [Ø10.9mm].

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GP	24/OCT/22
APPROVAL	BD	26/OCT/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

POLARIS LOW-DISTORTION
FIXED MOUNT FOR Ø1/2in OPTIC

MATERIAL	REV
STAINLESS STEEL	A

ITEM #	APPROX WEIGHT
POLARIS-B05F	0.02 kg