







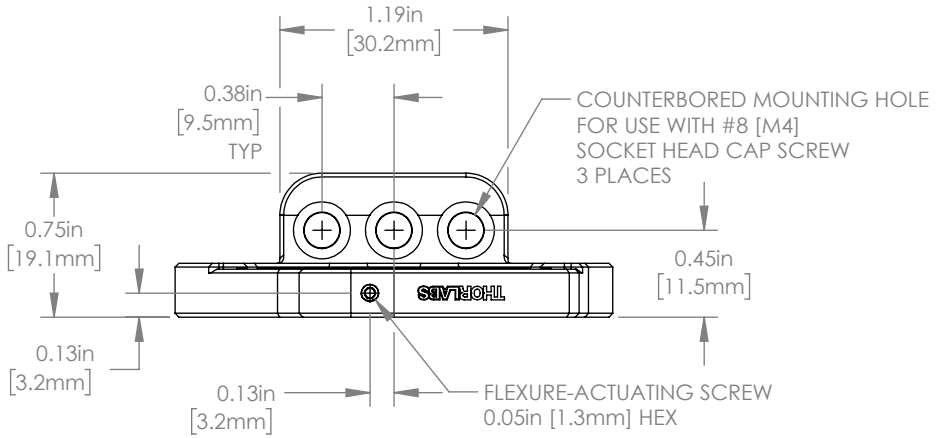


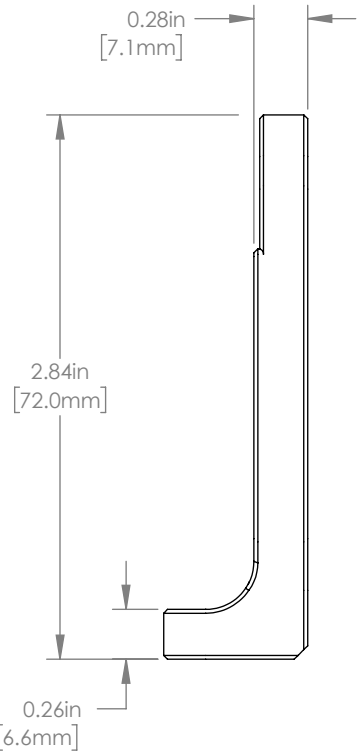

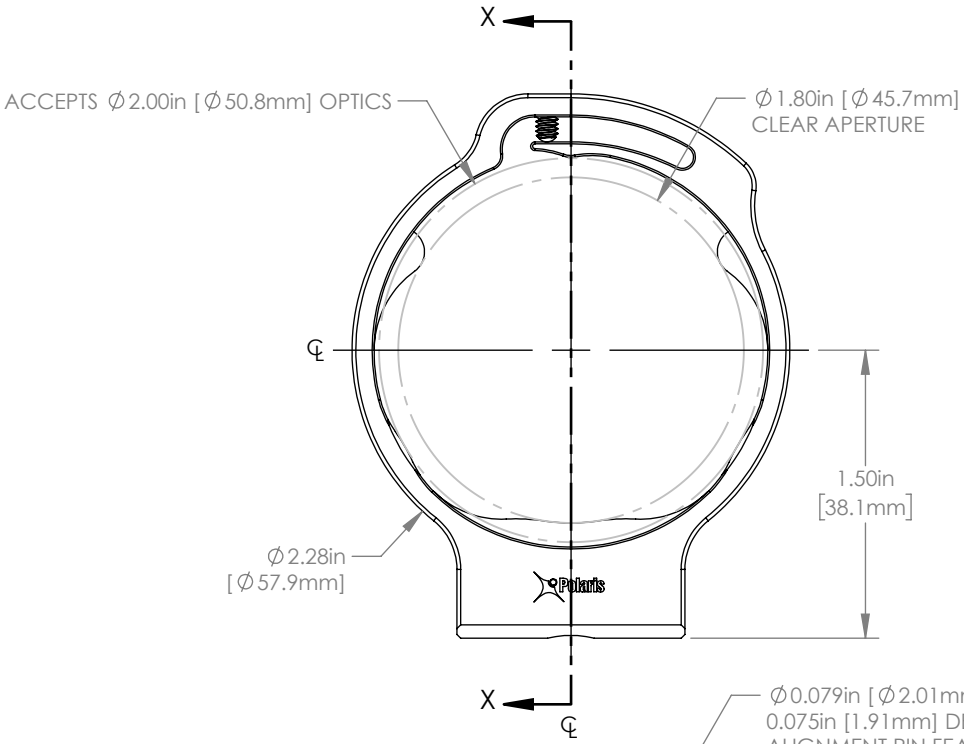

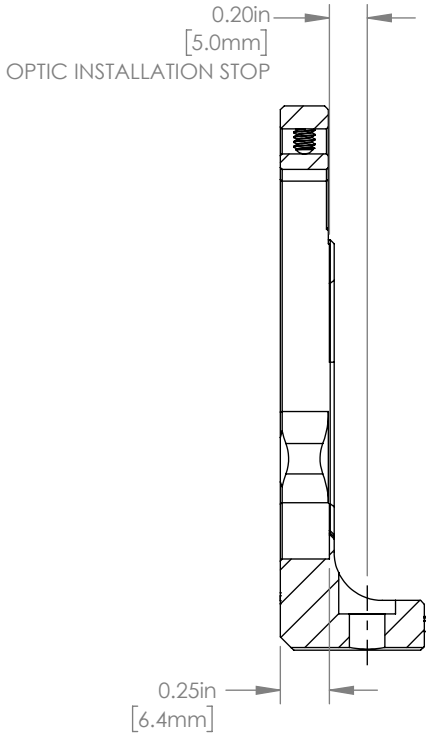

SECTION X-X

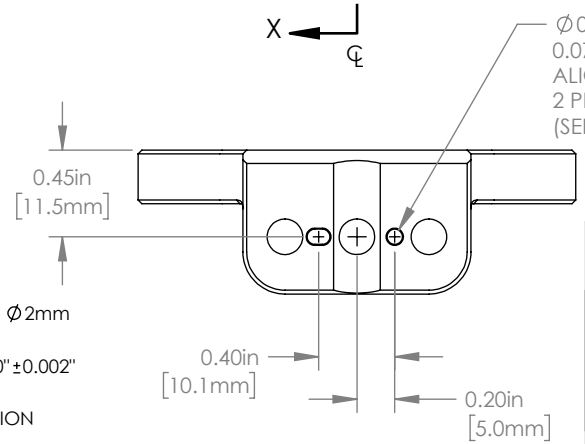

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

NOTES:
1. RECOMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURE IS A STANDARD Ø2mm DIN 7-m6 GROUND DOWEL PIN (Ø2.002mm TO Ø2.008mm).
2. FOR A Ø2mm x 5mm PIN, WE RECOMEND Ø0.0791" TO Ø0.0796" x 0.170"±0.002" DEEP HOLES BE MADE INTO THE MATING SURFACES FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF ±0.003".

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CS	22/JUL/20
APPROVAL	BD	10/JUL/24

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS

POLARIS BEAMSPLITTER
SIDE-RETENTION, Ø2" OPTIC MOUNT

MATERIAL	REV
STAINLESS STEEL	C

ITEM #	APPROX WEIGHT
POLARIS-B2S	0.069 kg