



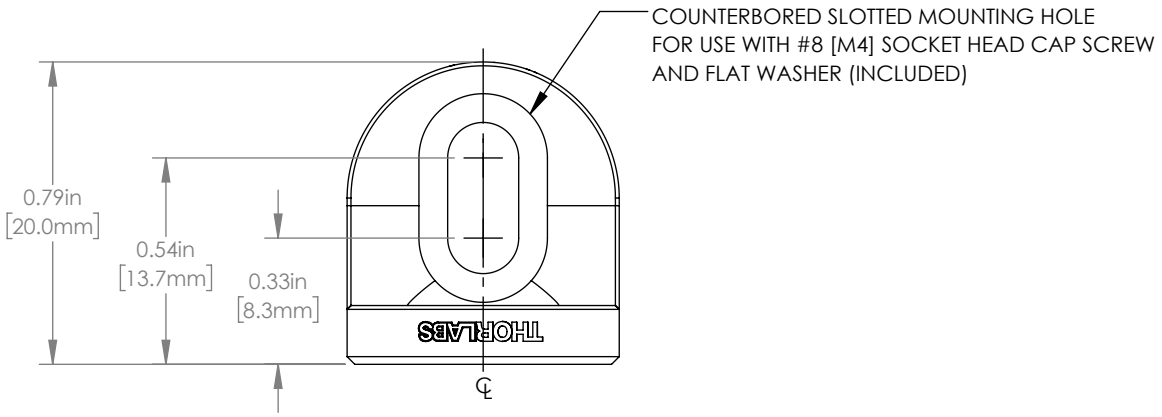


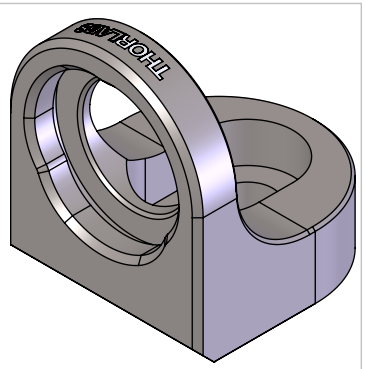


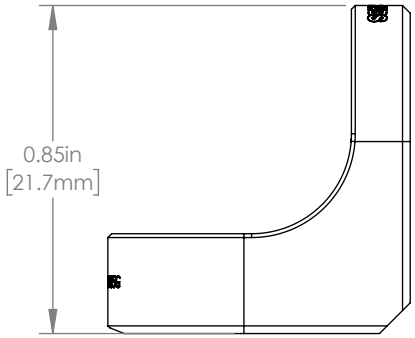


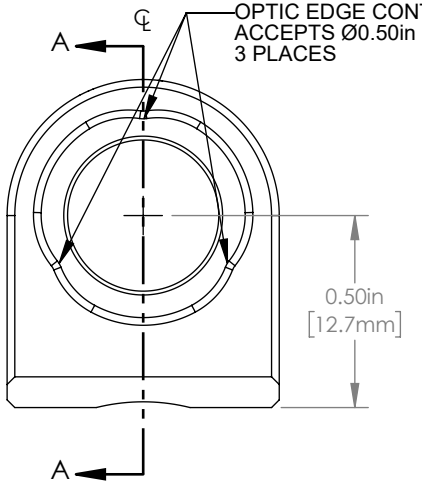

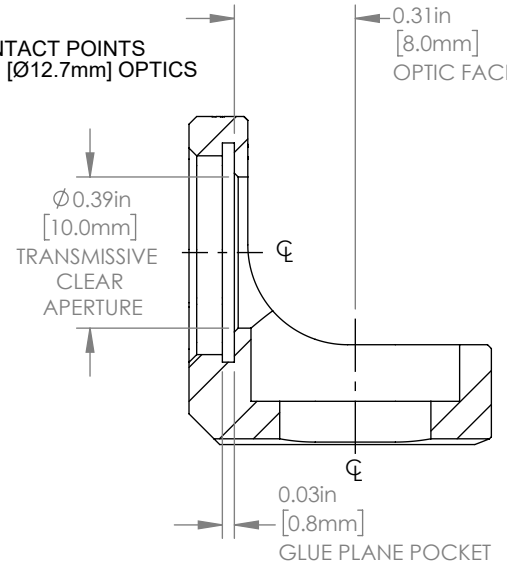

SECTION A-A

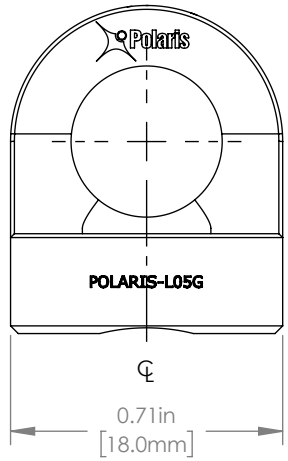

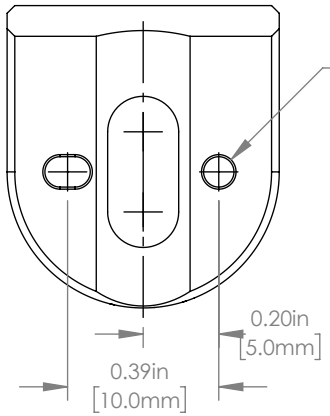

NOTE:
1) RECOMMENDED DOWEL PIN FOR ALIGNMENT FEATURES IS A STANDARD DIN 7-M6 (ISO 2338) GROUND DOWEL PIN.
2) FOR A Ø2mm X 5mm PIN, WE RECOMMEND A HOLE THAT IS Ø2.002mm TO Ø2.008mm IN DIAMETER X 0.185in±0.005 DEEP BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE SHOULD HAVE A TOLERANCE OF ±0.003in.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BD	09/MAY/2016
APPROVAL	AK	09/MAY/2016

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS

POLARIS GLUE IN 0.5" LENS MOUNT WITH FOCUS ADJUSTMENT

MATERIAL	REV
STAINLESS STEEL	B

ITEM #	APPROX WEIGHT
POLARIS-L05G	16.58g