
Pomona ELECTRONICS


Technical Data Sheet

Model 4288
Adapter, SMA Male to BNC Male

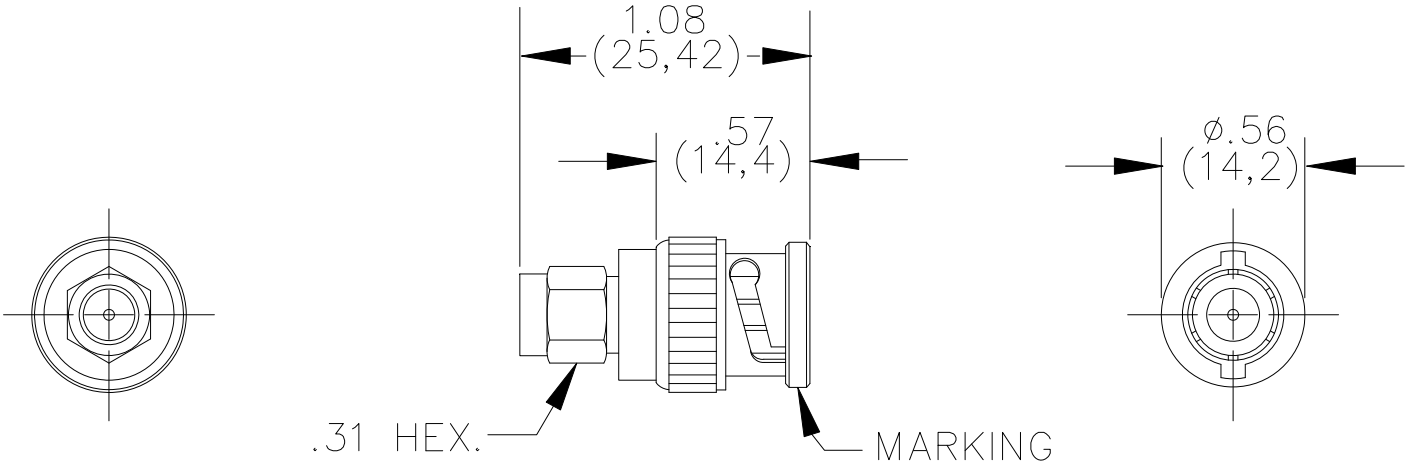

Materials

Body: Beryllium Copper
Contacts: Male – Brass
Finish: SMA Body – Gold Plated per MIL-G-45204, Type II, Class 2
BNC Body – Nickel Plated per QQ-N-290
Contacts – Gold Plated per MIL-G-45204, Type II, Class 2
Dielectric: PTFE per L-P-403

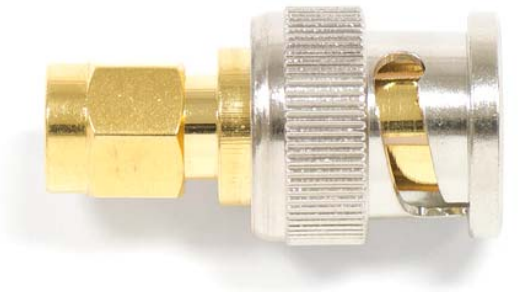

Specifications

Voltage: For *CE Compliance* and for personal safety, do not hold in hand when voltages exceed 33 Vrms/70 Vdc. Maximum voltage for *hands free use*: 335 Vrms Max.
Operating Temperature: -65ºC (-85ºF) to +165ºC (+329ºF)
Nominal Impedance: 50 Ohms
Frequency Range: 0 – 12.4 GHz.

Ordering Information

Model: 4288

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2009