



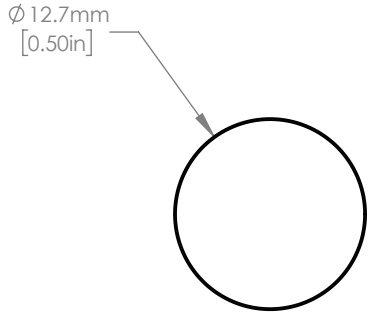

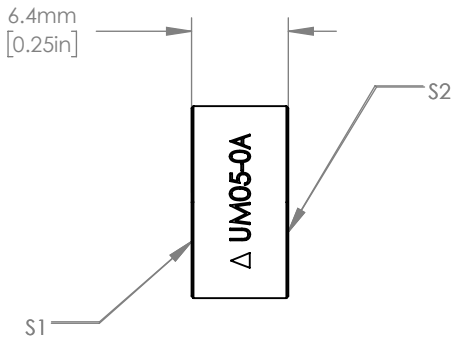

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > 80% DIAMETER
2. SURFACE FLATNESS (S1): < λ/3 AT 632.8 nm OVER CLEAR APERTURE
3. SURFACE QUALITY (S1): 15-5 SCRATCH-DIG
4. SURFACE (S2): POLISHED
5. PARALLELISM: ≤ 3 arcmin
6. THICKNESS TOLERANCE: ±0.20 mm
7. DIAMETER TOLERANCE: +0.00/-0.10 mm
8. COATING (S1): LOW GDD COATING
   AOI: 0°
   R > 99%, |GDD| < 30 fs², 720 nm – 900 nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JE	15/JUL/22
APPROVAL	KF	15/JUL/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø12.7 mm LOW GDD MIRROR
720 nm - 900 nm, 0° AOI

MATERIAL	REV
FUSED SILICA	A

ITEM #	APPROX WEIGHT
UM05-0A	2 g