



SCALE 2:1

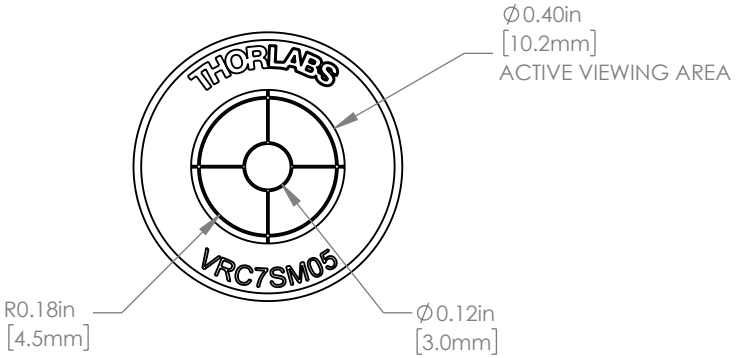

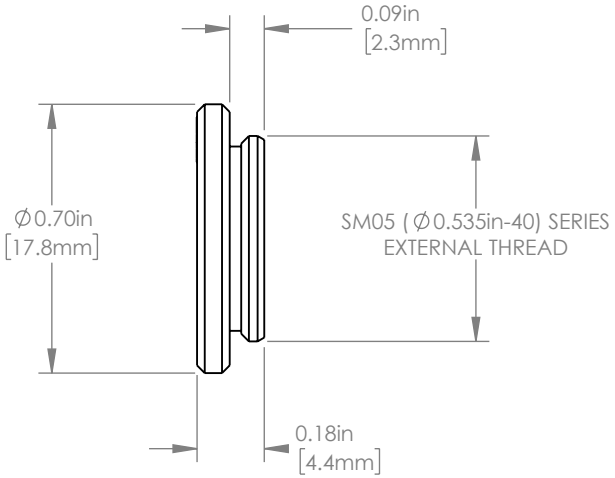

NOTES/SPECIFICATIONS:

1. DESCRIPTION: NIR FLUORESCING ALIGNMENT DISK IN EXTERNALLY SM05-THREADED HOUSING
2. ACTIVE REGION: Ø0.40" (Ø10.2 mm)
3. PHOSPHOR TYPE: STORAGE PHOSPHOR
4. CHARING REQUIRED: YES
5. ABSORBTION BAND: 440 – 560 nm CHARGING, 700 – 1400 nm STIMULATION
6. EMISSION BAND: 550 - 700 nm
7. PEAK EMISSION: 645 nm
8. DAMAGE THRESHOLD SINGLE PULSE 7 ns: 35 MW/cm² @ 1064 nm (ESTIMATED)
9. HOUSING MATERIAL: ALUMINUM

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	TA	21/JAN/25
APPROVAL	RH	21/JAN/25

COPYRIGHT © 2025 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SM05 NIR ALIGNMENT DISK

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
VRC7SM05	1.5 g