

ASPHERIC COEFFICIENTS

| | R | k | $A_4$ | $A_6$ | $A_8$ | $A_{10}$ | $A_{12}$ | $A_{14}$ | $A_{16}$ |
|---|---|---|---|---|---|---|---|---|---|
| S1 | PLANO | - | - | - | - | - | - | - | - |
| S2 | -6.428042 | -0.578747 | -2.792924E-06 | 3.958166E-07 | 1.124255E-09 | 3.446196E-10 | - | - | - |

ASPHERIC LENS EQUATION

$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12} + A_{14}Y^{14} + A_{16}Y^{16}$$

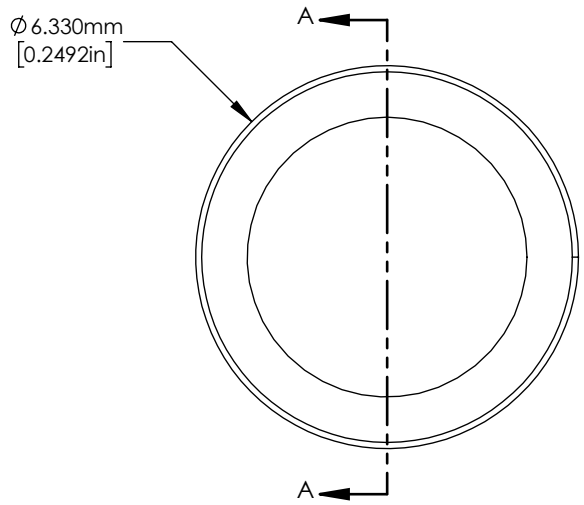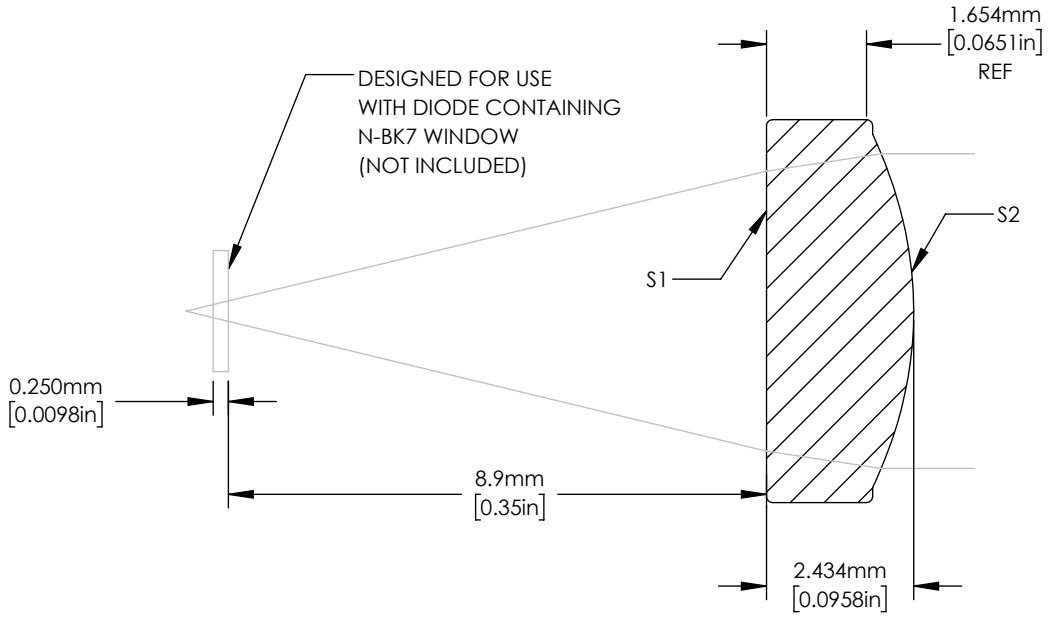


SECTION A-A

NOTES/SPECIFICATIONS:

1. MATERIAL: D-ZK3
2. REFRACTIVE INDEX: 1.586 @ 587.6nm
3. DESIGN WAVELENGTH: 633 nm
4. CLEAR APERTURE:
   (S1) Ø4.63 mm
   (S2) Ø5.20 mm
5. LASER WINDOW MATERIAL: N-BK7
   WINDOW THICKNESS: 0.250 mm
   REFRACTIVE INDEX: 1.517 @ 587.6nm
6. EFFECTIVE FOCAL LENGTH: 11.0 mm±1.0%
7. NUMERICAL APERTURE: 0.24
8. DIAMETER TOLERANCE: ±0.015 mm
9. CENTER THICKNESS TOLERANCE: ±0.050 mm
10. SURFACE QUALITY: 60-40 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
11. RMS WFE: ≤ DIFFRACTION LIMITED
12. MAGNIFICATION: INFINITE

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | JAC | 08/SEP/20 |
| APPROVAL | DD | 05/DEC/23 |

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

0.24 NA ASPHERIC LENS,
f=11.0 mm, DW=633 nm

| MATERIAL | REV |
|---|---|
| SEE NOTES | C |

| ITEM # | APPROX WEIGHT |
|---|---|
| 354061 | 0.18 g |