



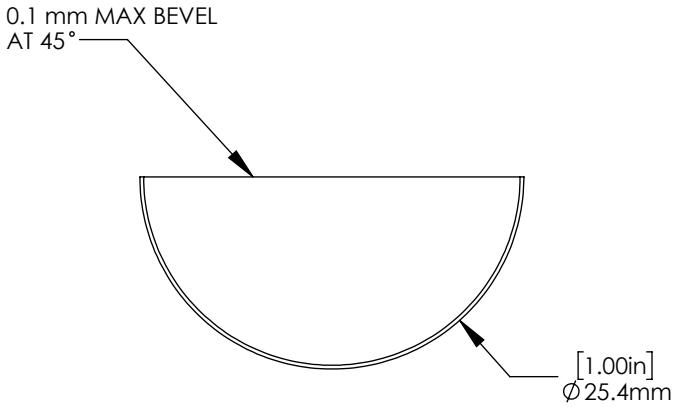

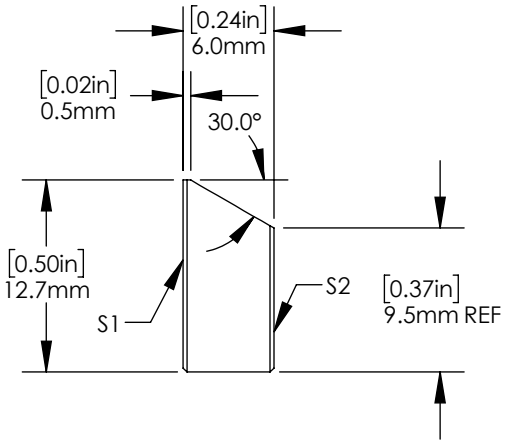

NOTES/SPECIFICATIONS

1. CLEAR APERTURE: > ∅22.86 mm
2. SURFACE QUALITY: (S1) 10-5 SCRATCH DIG
3. SURFACE FLATNESS: (S1) λ/10 @ 633 nm
   (S2) FINE GROUND
4. PARALLELISM: ≤ 5 arcmin
5. DESIGN WAVELENGTH RANGE: 750-1100 nm
6. COATING (S1): BROADBAND HR, DIELECTRIC
   $R_{S,AVG}$ AND $R_{P,AVG}$ >99% FROM 750-1100 nm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BAG	11/JUNE/08
APPROVAL	JC	17/SEP/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅25.4 mm BROADBAND DIELECTRIC "D" SHAPED MIRROR 750-1100 nm

MATERIAL	REV
FUSED SILICA	B

ITEM #	APPROX WEIGHT
BBD1-E03	3 g