



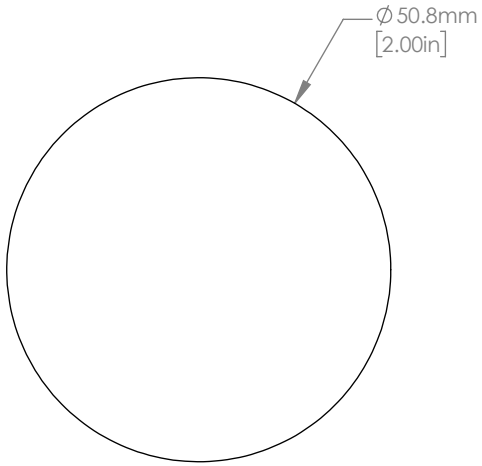

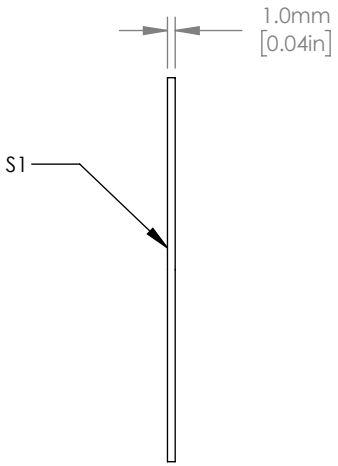

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > Ø 45.7 mm
2. TRANSMITTED WAVEFRONT ERROR: <λ OVER CLEAR APERTURE
3. SURFACE QUALITY: 60-40 SCRATCH-DIG
4. PARALLELISM: <3 arcmin
5. DIAMETER TOLERANCE: +0.00/-0.20 mm
6. THICKNESS TOLERANCE: ±0.10 mm
7. COATING: TRANSMISSION: >85% AVG 400-550 nm
   REFLECTION: >90% AVG 610-725 nm
   CUT-ON TOLERANCE: 580 nm±15 nm
   AOI: 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JAC	09/OCT/20
APPROVAL	DD	09/OCT/20

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø 50.8 mm RED REFLECTOR, 45°

MATERIAL	REV
SODA LIME	C

ITEM #	APPROX WEIGHT
FM202	5.0g