



SCALE 1:1



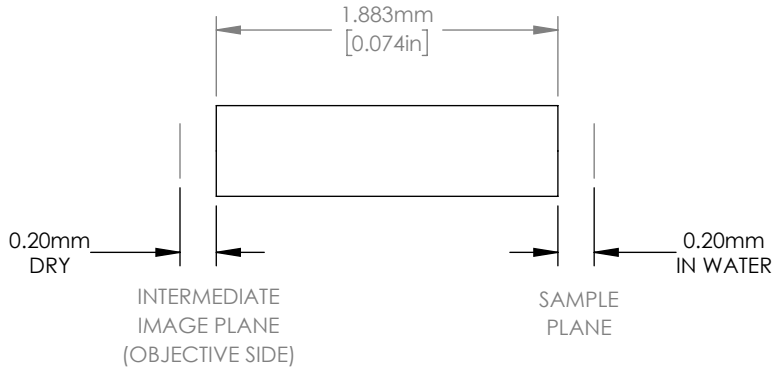

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 550nm
2. PITCH: 0.387 @ 550nm
3. INDEX (n_1): 1.666 @ 550nm
4. GRADIENT INDEX CONSTANT: 1.291 mm^{-1} @ 550nm
5. ON AXIS NA: 0.486 IN WATER
6. VIEWING ANGLE: 50°
7. FIELD CURVATURE: 50µm
8. POLARIZATION PRESERVATION: N/A
9. OPERATING TEMPERATURE: <350°C
10. MAGNIFICATION: 0.96
11. LINEAR TOLERANCE: ±0.620mm [0.024in]
12. DIAMETER TOLERANCE: +0/-0.03mm
13. BBAR COATING:
    R AVERAGE: <1% FROM 515-670nm, AND FROM 900-1040nm
    R AVERAGE: <2.5% FROM 950-1100nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	AG	27/JUN/19
APPROVAL	BJ	01/OCT/25

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

GRIN Lens; WD=0.20 mm; L=1.883 mm; Pitch=0.387

MATERIAL	REV
N/A	B

ITEM #	APPROX WEIGHT
G2P11	0.001 g