



	PART	MATERIAL
1	RETROREFLECTOR MOUNT	STAINLESS STEEL
2	1.8" HOLLOW RETROREFLECTOR MIRROR PROTECTED SILVER	N-BK7
3	ENGRAVED SM1P1	ANODIZED ALUMINUM
4	2 x NYLON-TIPPED LOCKING SCREW, 5/64" HEX	STAINLESS STEEL

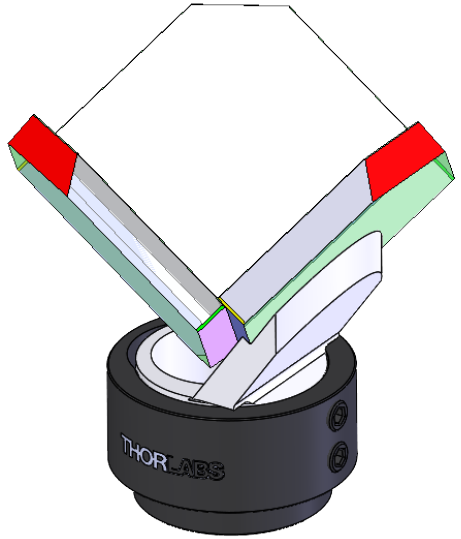

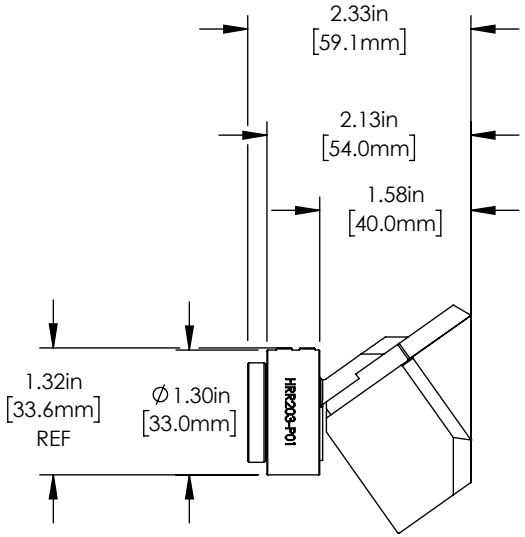

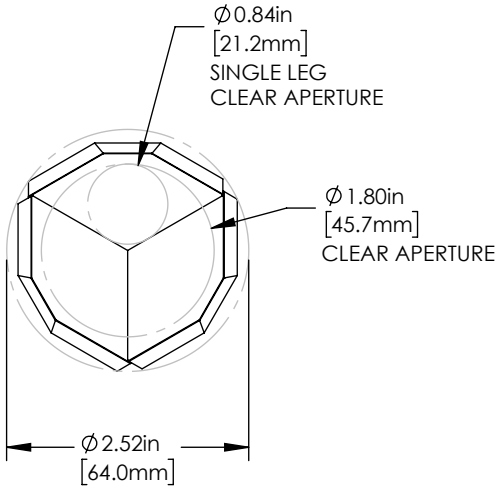

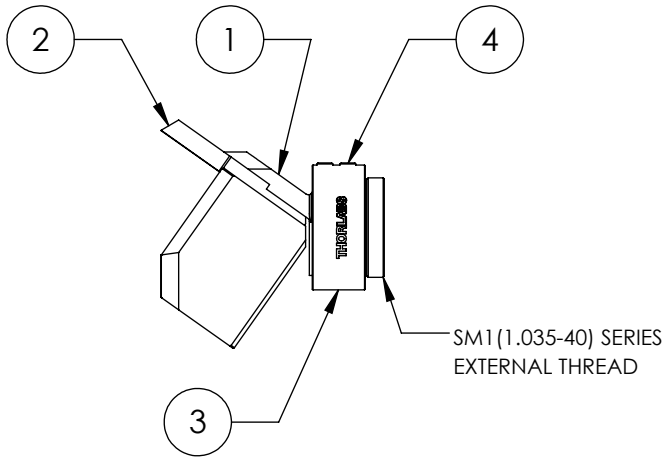

NOTES/SPECIFICATIONS:

1. SURFACE QUALITY: 40-20 SCRATCH-DIG
2. SURFACE FLATNESS: <λ/4 @ 633nm
3. BEAM DEVIATION: <20 arcsec
4. REFLECTIVE COATING: PROTECTED SILVER, Ravg > 97% (450 nm - 2 µm), Ravg > 95% (2 µm - 20 µm)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CS	25/JUN/20
APPROVAL	ME	22/SEP/20

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1.8" HOLLOW RETROREFLECTOR MIRROR PROTECTED SILVER

MATERIAL	REV
SEE TABLE	A

ITEM #	APPROX WEIGHT
HRR203-P01	110g