



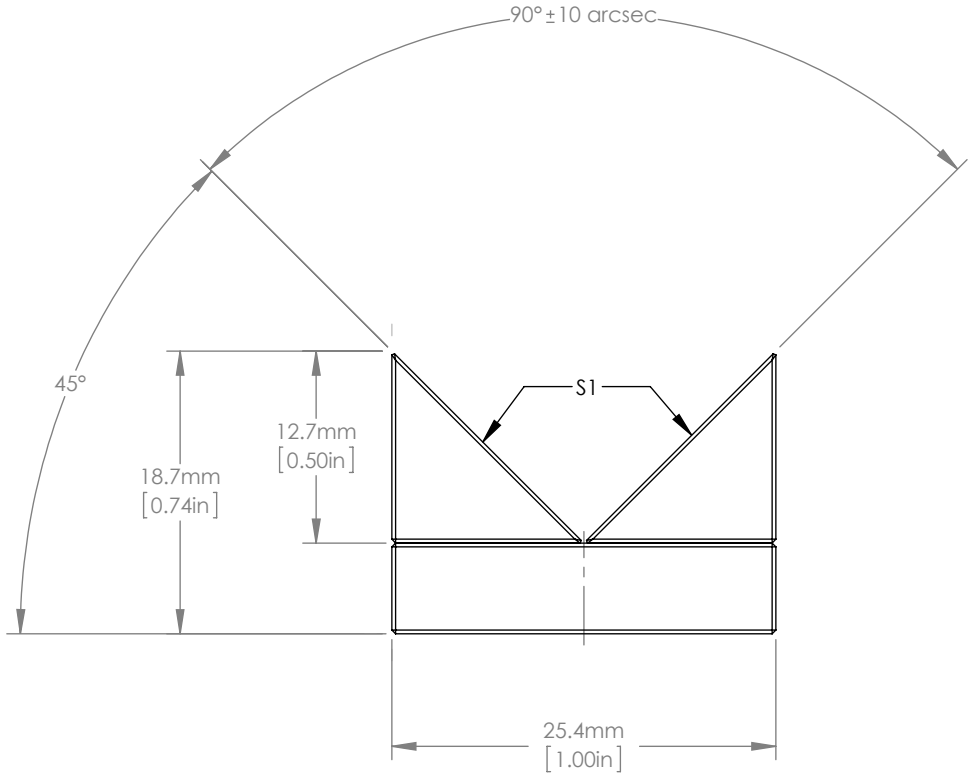

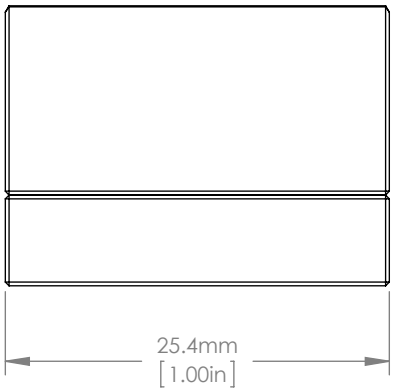

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: >80% OF FACE DIMENSIONS
2. SURFACE QUALITY(S1): 40-20 SCRATCH-DIG
3. REFLECTED WAVEFRONT ERROR: <0.5 WAVES
4. SURFACE FLATNESS(S1): <λ/4 AT 633nm
5. DIMENSIONAL TOLERANCE: ±0.2mm
6. COATING: ENHANCED AG
   WAVELENGTH RANGE: 750 - 1000 nm
   AOI: 45
   S-POLARIZATION: R > 99.0%
   P-POLARIZATION: R > 98.5%

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	10/MAR/16
APPROVAL	DD	10/MAR/16

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1IN SQUARE HOLLOW ROOF MIRROR ENHANCED AG

MATERIAL	REV
FUSED SILICA	A

ITEM #	APPROX WEIGHT
HRS1015-AG	18 g