
PART NUMBER	L (CABLE LENGTH)	WEIGHT
PA312	12" (305 mm)	0.02 lbs [9.0 g]
PA324	24" (609 mm)	0.03 lbs [13.6 g]
PA348	48" (1219 mm)	0.05 lbs [22.7 g]
PA372	72" (1829 mm)	0.06 lbs [27.2 g]



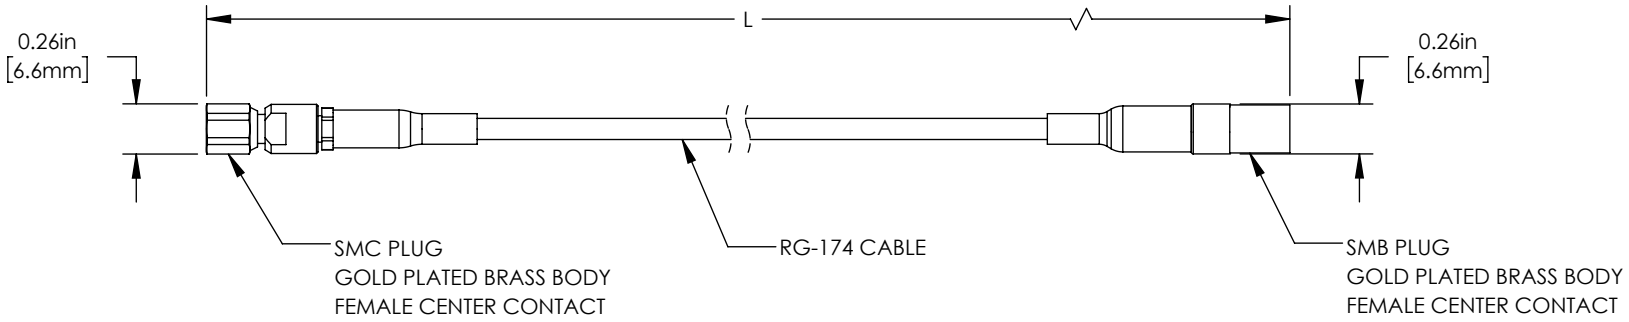

NOTES:
1. RG-174 COAXIAL CABLE
2. CABLE DIAMETER 0.11in [2.8mm]
3. MIN BEND RADIUS: 0.40in [10.2mm]
4. IMPEDANCE: 50 Ω
5. FREQUENCY RANGE: DC - 1 GHz
6. DIELECTRIC WITHSTANDING VOLTAGE: 500 Vdc
7. CABLE LENGTH (L) IS MEASURED FROM CONNECTORS, END TO END

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	TA	02/FEB/24
APPROVAL	RH	02/FEB/24

COPYRIGHT © 2024 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS

SMB STRAIGHT TO SMC CABLE

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
SEE TABLE	SEE TABLE